


WAVE

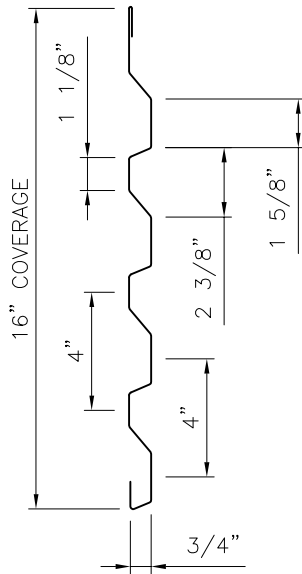

WAVE PANEL PROFILE
Standard Width(s)- 16"

Applications

Concealed fastener "hook & cleat" interlocking panel (asymmetrical ribs) used on horizontal or vertical wall applications.

Substrates

Plywood - Nailers - Subgirts

Standard Materials

Alum-Zinc coated steel

Standard Gauge

24 ga. 22 ga.

Finishes



Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth

Manufacturing


Factory

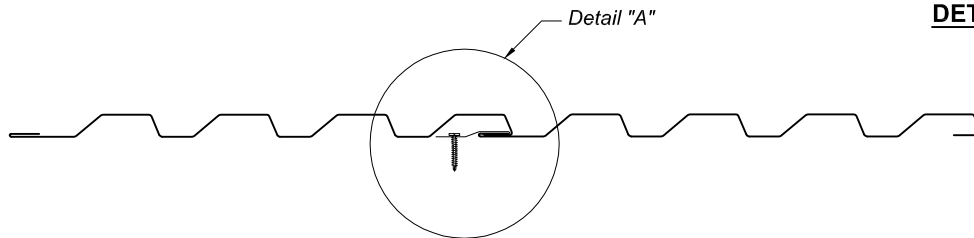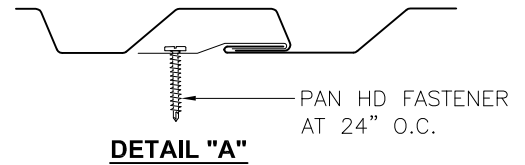

SEAM ENGAGEMENT

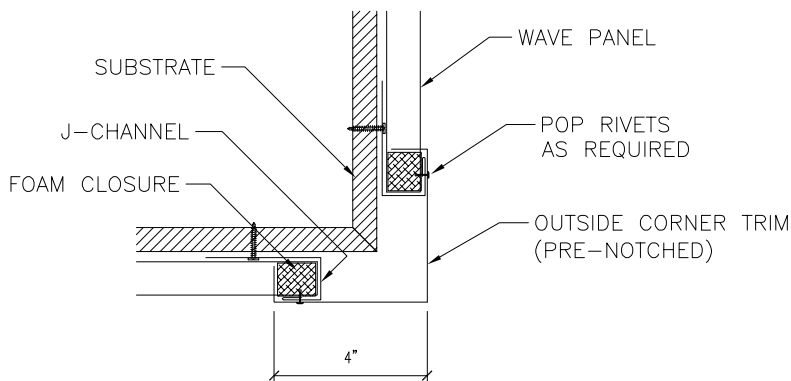

OUTSIDE CORNER DETAIL

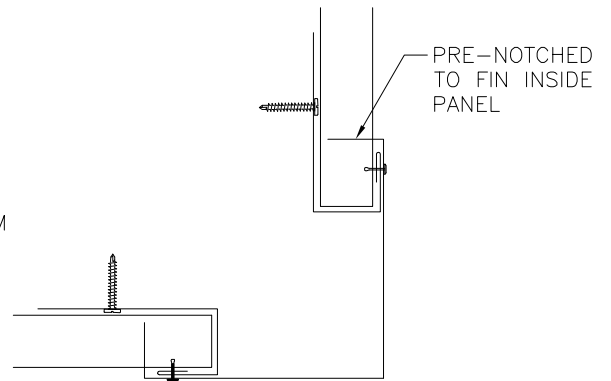

ENLARGED OUTSIDE CORNER DETAIL

*Substrate & Foam Closures not shown for clarity