


238T PANEL

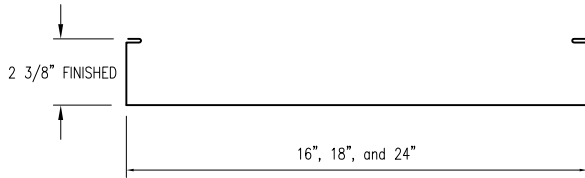

238T PANEL PROFILE
Standard Width- 16"-18" and 24"

Applications

Symmetrical structural roof/wall panel used on slopes down to 1/4:12. Continuous length up to 300ft. Tapered panels up to 60ft. Convex and concave curving available.

Substrates

Plywood-Nailers-Subgirts-Purlins-Metal Deck

Standard Materials

Alum-Zinc coated steel
.040 Aluminum

Standard Gauge

24 ga. 22 ga.

Finishes


Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth, Striations, Stiffener Ribs

Manufacturing


Factory, Jobsite

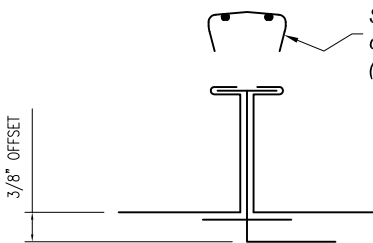


SEAM ENGAGEMENT




STANDARD CLIP
16 GAUGE

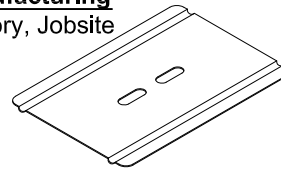


BEARING PLATE
24 GAUGE, 50 KSI STEEL.

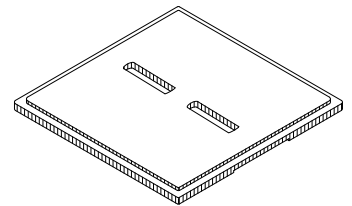


STACKABLE LEVELING SHIM
6" x 6" x 1/4" THICK

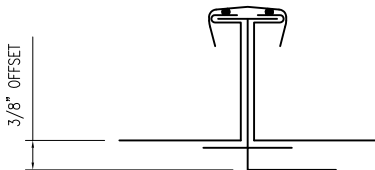


BEFORE SEAMING

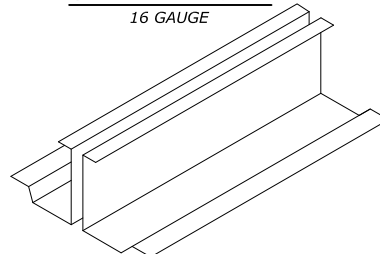


MULTISPAN CLIP
2-PIECE

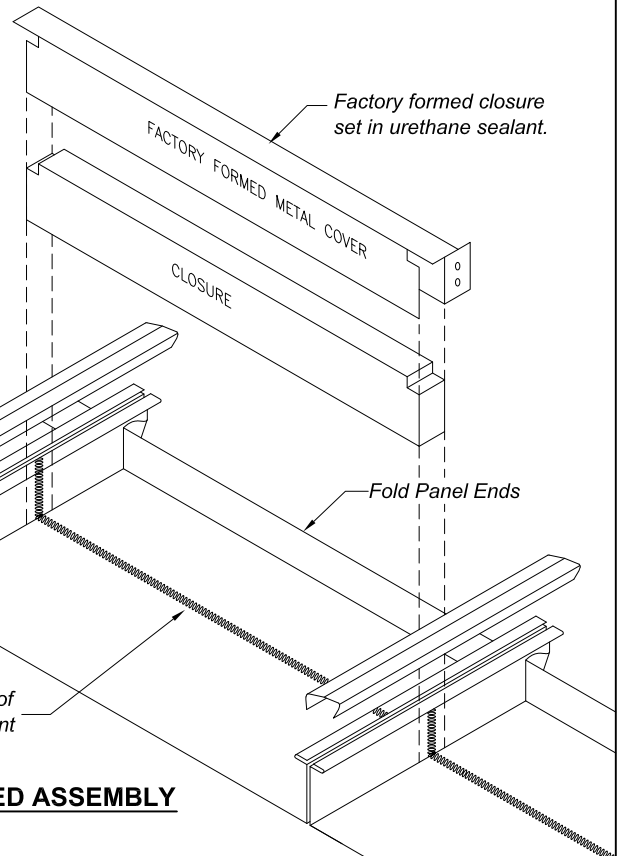


EXPLODED ASSEMBLY



HAND SEAMER

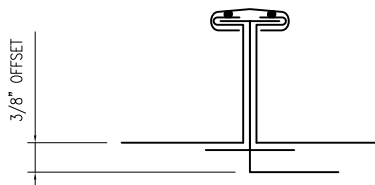

AFTER SEAMING

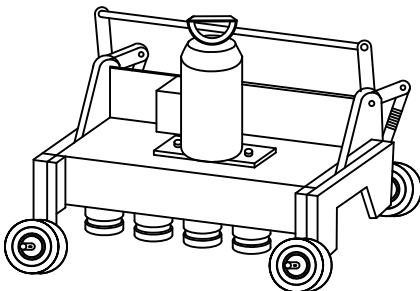

MECHANICAL SEAMER