


7/8" CORRUGATED

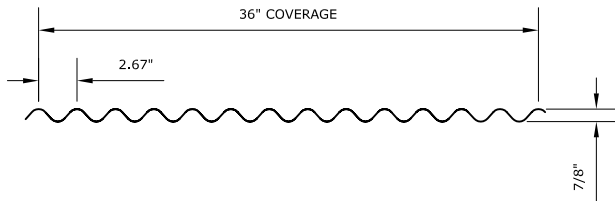

7/8" CORRUGATED PANEL PROFILE

Standard Width(s)- 38 1/4" (36" Coverage)

Applications

The 2.67" x 7/8" corrugated sheet is an exposed fastener panel with up to 36" coverage that can be used on roof and wall applications. Corrugated sheets are produced to a standard siding profile with both longitudinal edges of the sheet formed down, allowing the sheet to be installed without alternating the ends.

Substrates

Purlins-Joists-Hat Channels

Standard Materials

Alum-Zinc coated steel

Standard Gauge

22 ga. 24 ga.

Finishes


Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth

Manufacturing

Factory

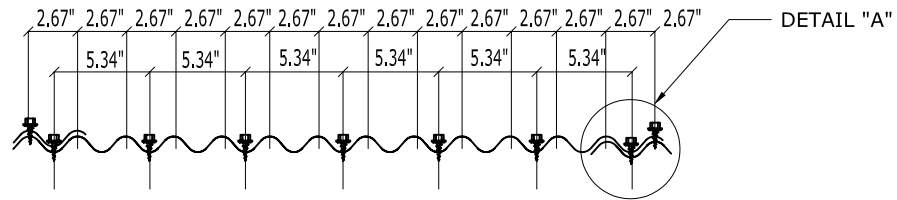


PANEL FASTENER LOCATIONS @ PANEL ENDS

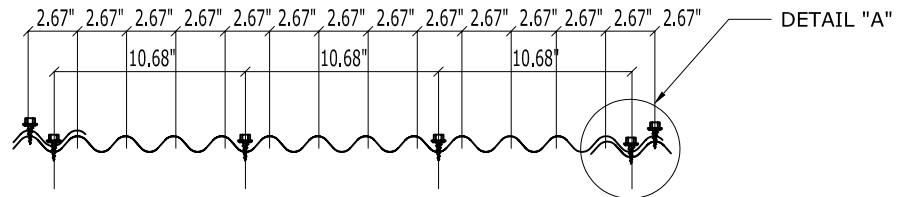

PANEL FASTENER LOCATIONS @ MIDDLE OF PANEL

SIDE LAP FASTENERS ARE REQUIRED.
TYPICAL SPACING IS 20" O.C..
MINIMUM 1/2" X 3/8" TAPE SEALANT /
IN PANEL SIDE LAPS.



DETAIL "A"