


WAVE PANEL

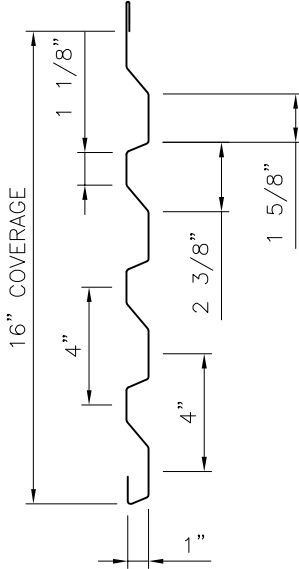

WAVE PROFILE
Width- 16"

Applications

Concealed fastener "hook & cleat" interlocking panel (asymmetrical horizontal ribs) used on wall applications.

Substrates

Plywood, Nailers, Hat Channels, Purlins, Subgirts

Standard Material

Alum-Zinc coated steel

Optional Material

ABC DuraZinc®

Standard Gauge

24 ga.

Optional Gauge

22 ga.

Manufacturing


Factory
Jobsite roll-formed

Finishes


Acrylic Coated Galvalume and Fluoropolymer (Kynar 500® PVDF resin-based)

Testing/Agency Approvals


Uplift: ASTM E-1592

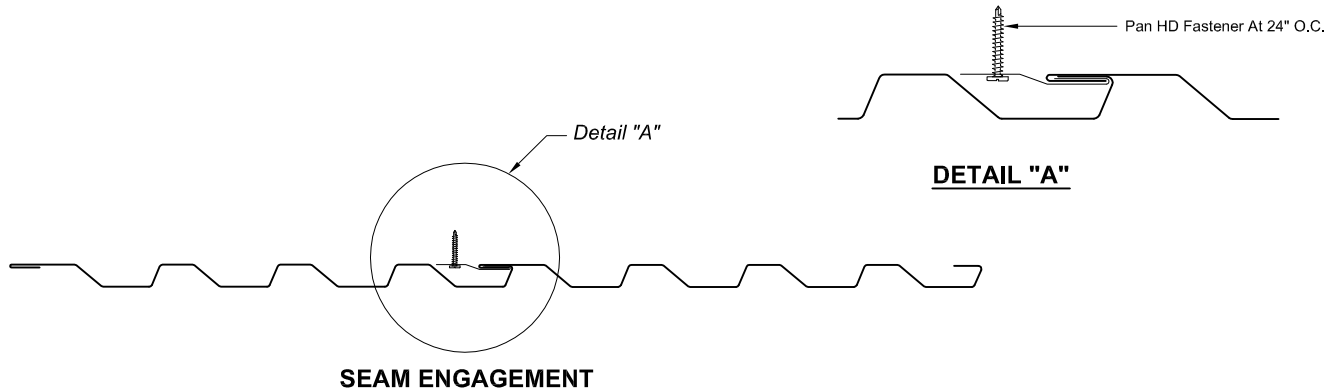

SEAM ENGAGEMENT

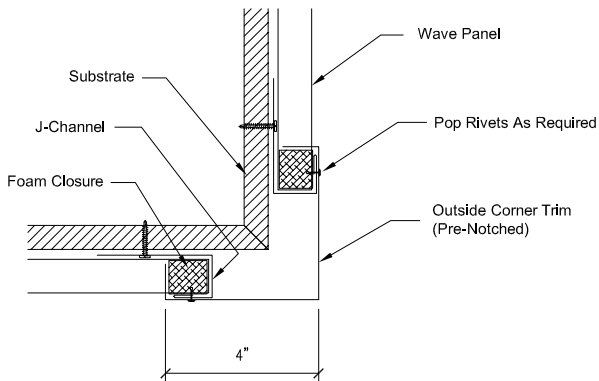

OUTSIDE CORNER DETAIL

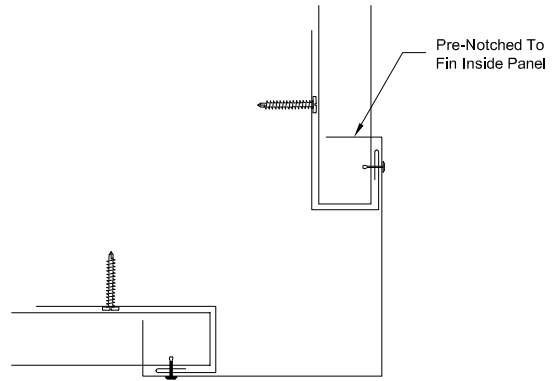

ENLARGED OUTSIDE CORNER DETAIL

*Substrate & Foam Closures Not Shown For Clarity