



UD Liner

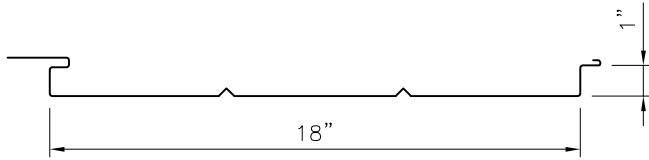

UD LINER PANEL PROFILE (SMOOTH)
~VEE GROOVES @ 6" O.C.~
 Standard Width(s)- 18"

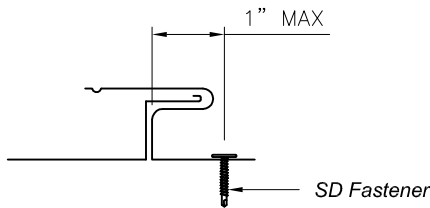

Applications

Tongue-and-groove interlock panel used as soffit/liner panel.

Substrates

Open Framing - 4'-0" o.c.

Standard Materials

Alum-Zinc coated steel

Standard Gauge

24 ga.

Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)


Texture

Smooth with 2 Vee Grooves at 6" o.c.


Manufacturing

Factory

UD LINER PANEL SEAM

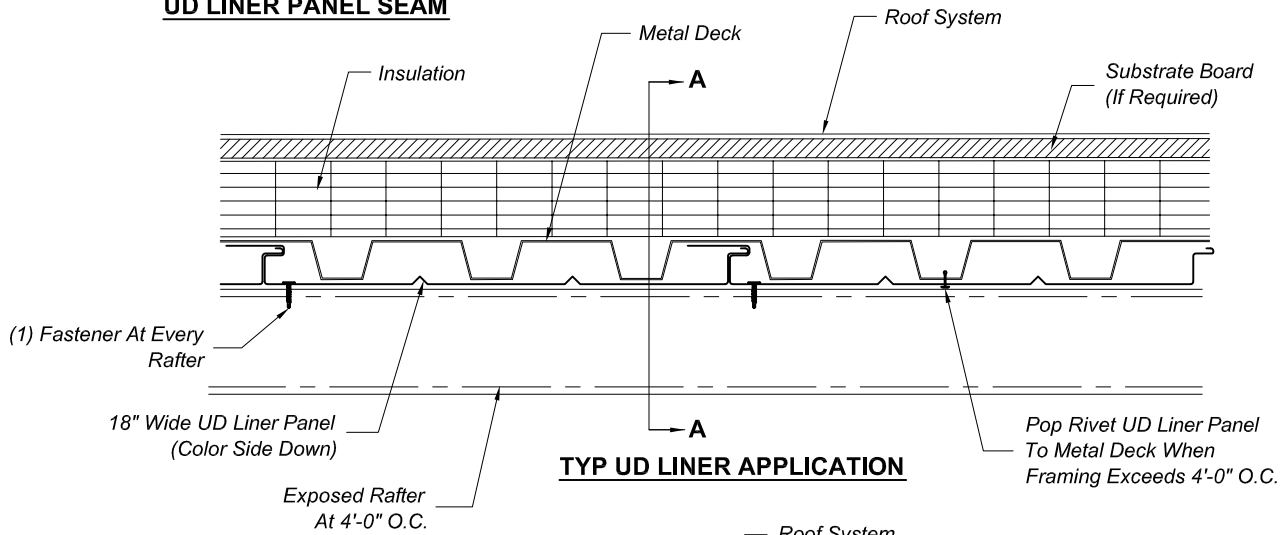

TYP UD LINER APPLICATION

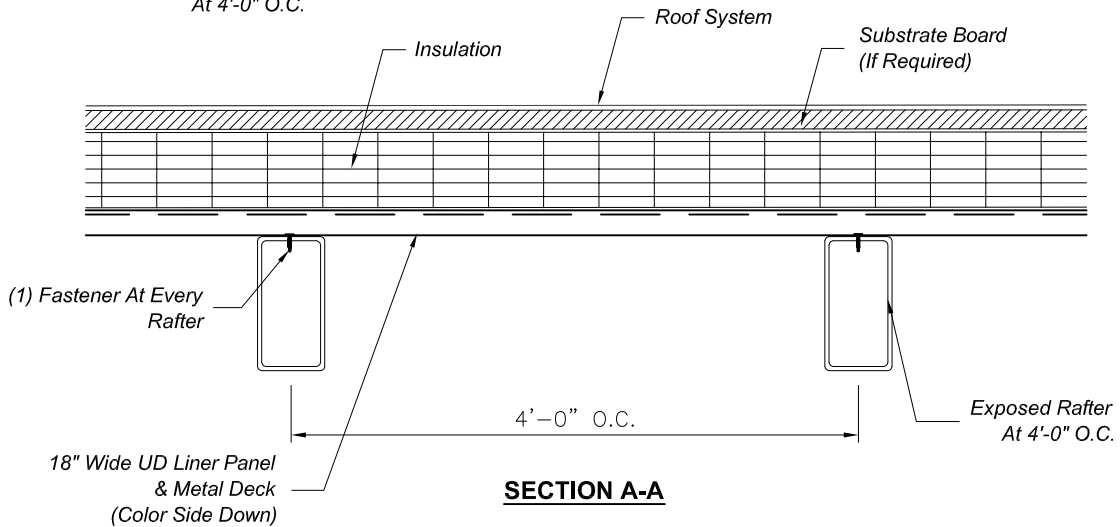

SECTION A-A