


# PBR-PANEL

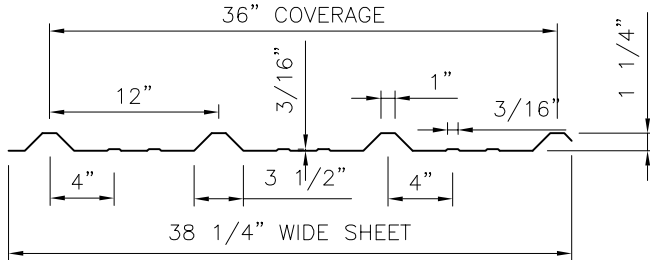

### PBR PROFILE

Optimum Width- 38 1/4" (36" Coverage)

### Applications

PBR-panel is an exposed fastener panel with 36" coverage. It can be used on roof or wall applications. This panel also has a "purlin bearing" leg which helps ensure the panel laps properly and the lap fasteners make the tightest possible compression seal in the panel side lap.

### Substrates

Purlins, Joists, Hat Channels, Deck

### Standard Gauge

24 ga.

### Standard Material

Alum-Zinc coated steel

### Optional Gauge

22 ga., 26 ga.

### Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500® PVDF resin-based)

### Texture


Smooth

### Manufacturing


Factory

### Testing/Agency Approvals

Uplift: UL 580, UL 1897

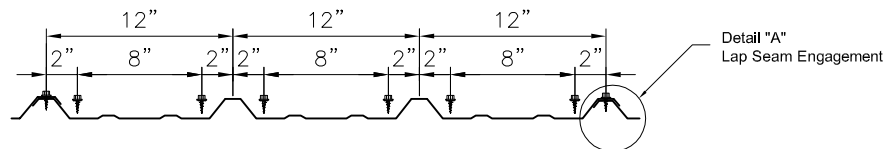


**PANEL FASTENER LOCATIONS AT PANEL ENDS**

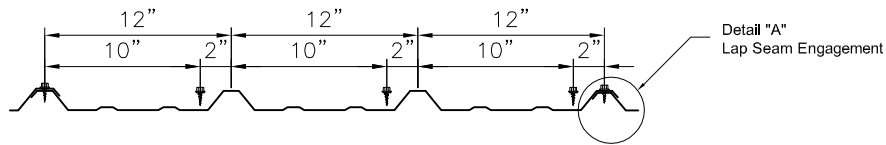

**PANEL FASTENER LOCATIONS AT MIDDLE OF PANEL**

Side Lap Fasteners Are Required.  
Typical Spacing Is 20" O.C.  
Minimum 1/2" X 3/32" Tape Sealant  
In Panel Side Laps.

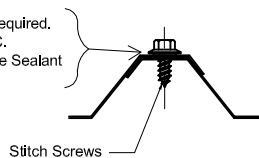

**DETAIL "A"  
LAP SEAM ENGAGEMENT**