

Instaloc Standing Seam Panel

Applications

Non Structural panel used on roof slopes 3" per foot or greater.
Continuous lengths up to 80 ft.

Substrates

Plywood - Metal Deck

Standard Materials

Alum-Zinc coated steel

Standard Gauges

24 ga. 26 ga.

Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Striated

Manufacturing

Factory or Jobsite Roll Formed


Testing / Agency Approvals

UL 580 Class 90 Uplift - UL-1897 Uplift - Tx Windstorm RC-86 -
Tx Windstorm RC-93 - FL-4243 - FL 2804 - UL Class 4 Impact
Resistance - UL Class A Fire Rating

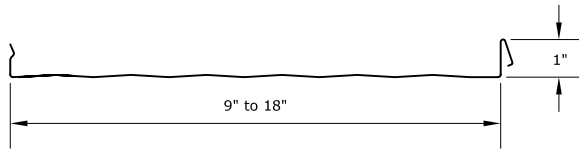


INSTALOC PROFILE W/ STRIATIONS


Standard Width(s)- 13" and 18"

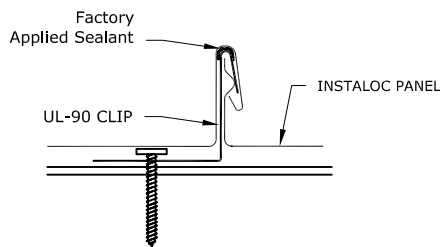


INSTALOC PANEL SEAM

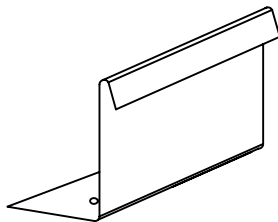

24 GAUGE INSTALOC CLIP
(2 FASTENERS)

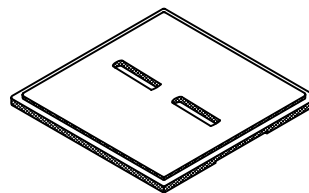

STACKABLE LEVELING SHIM
6" x 6" x 1/4" THICK



BEARING PLATE
24 GAUGE, 50 KSI STEEL