




# Instaloc Standing Seam Panel




**SMOOTH PROFILE**  
Optimum Widths- 13" and 17 3/4"



**STRIATIONS PROFILE**  
Optimum Widths- 13" and 17 3/4"



**STIFFENER RIBS PROFILE**  
Optimum Widths- 13" and 17 3/4"

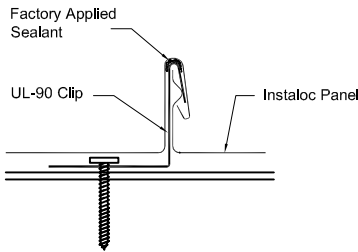

**SEAM ENGAGEMENT**

**Applications**

Non Structural panel used on roof slopes 3" per foot or greater. Continuous lengths up to 80 ft.

**Substrates**

Plywood, Metal Deck

**Standard Gauge**

24 ga.

**Standard Material**

Alum-Zinc coated steel

**Optional Gauge**

22 ga.

**Optional Material**

Copper

**Finishes**

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500® PVDF resin-based)

**Texture**

Smooth, Striated, Stiffener Ribs

**Manufacturing**

Factory or Jobsite Roll-formed


**Testing / Agency Approvals**

Uplift: UL 580, UL 1897


Air & Water Infiltration: ASTM E-283, ASTM E-331

Impact Resistance: UL Class 4; Fire Rating: UL Class A


Texas Windstorm; Florida Building Code



**24 GAUGE CLIP**  
(2 Fasteners)



**STACKABLE LEVELING SHIM**  
6" x 6" x 1/4" Thick



**BEARING PLATE**  
24 GA. 50 KSI Steel.