



SnapLock Standing Seam Panel

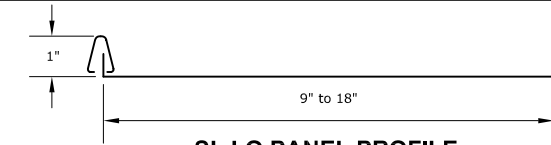


SL LO PANEL PROFILE
Standard Width(s)- 12" and 14 1/2"

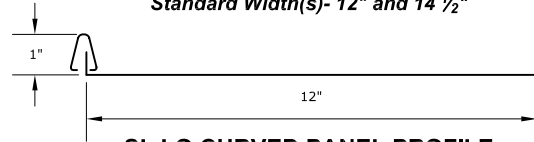

SL LO CURVED PANEL PROFILE
12" ONLY (Minimum Radius= 2'-6")



SL BATTEN PANEL PROFILE
Standard Width(s)- 17"

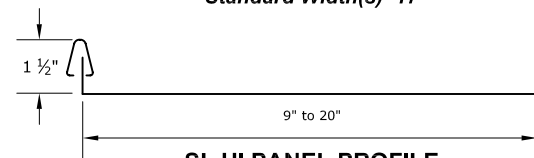

SL HI PANEL PROFILE
Standard Width(s)- 13 1/2" and 18"

Applications

Non Structural panel used on roof slopes 3" per foot or greater. Continuous lengths up to 60 ft. max.

Substrates

Plywood (solid deck) - Metal Deck

Standard Materials

Alum-Zinc coated steel

Standard Gauge

24 ga.

Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500)

Texture


Smooth or Striated

Manufacturing


Factory or Jobsite Roll Formed
Curved on site - Curved at Plant

Testing / Agency Approvals

UL 580 Class 90 Uplift - ASTM E-283 Air Infiltration - ASTM E-331 Water Penetration -UL Class 4 Impact Resistance - UL Class A Fire Rating

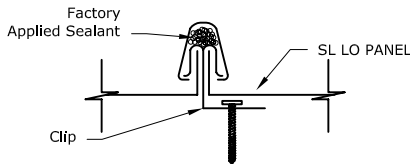


SL LO & SL LO CURVED PANEL SEAM

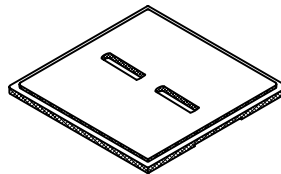


STACKABLE LEVELING SHIM

6" x 6" x 1/4" THICK




SL LO & SL LO CURVED PANEL CLIP

24 GAUGE

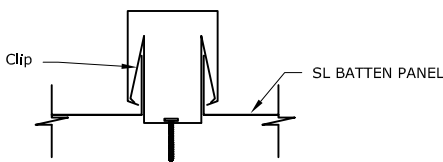


SL BATTEN PANEL SEAM




BEARING PLATE

24 GAUGE, 50 KSI STEEL.




SL BATTEN PANEL CLIP

24 GAUGE

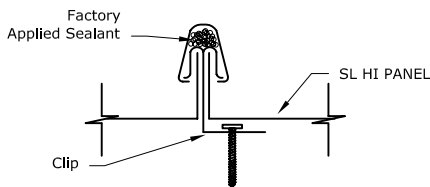

SL HI PANEL CLIP



SL HI PANEL CLIP

24 GAUGE