



FW PANEL SERIES

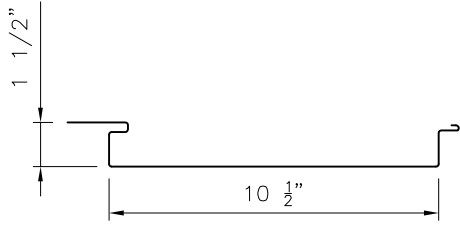


SMOOTH PROFILE

Optimum Width- 10 $\frac{1}{2}$ "

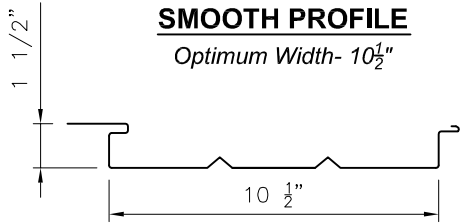

DEEP VEE GROOVES PROFILE

Optimum Width- 10 $\frac{1}{2}$ "

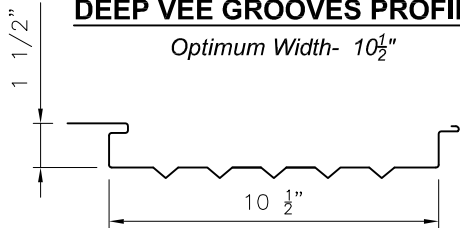

5 PENCIL RIBS PROFILE

Optimum Width- 10 $\frac{1}{2}$ "

Applications

Tongue-and-groove interlock panel used on vertical and horizontal applications on walls or fascias. Can be used as an exterior wall panel, interior liner panel or soffit.

Substrates

Plywood, Hat Channels, Subgirts, Purlins

Standard Material

Alum-Zinc coated steel

Standard Gauge

24 ga.

Optional Material

ABC DuraZinc®

Optional Gauge

22 ga.

Finishes

Acrylic Coated Galvalume and Fluoropolymer (Kynar 500® PVDF resin-based)

Texture


Smooth, Vee Grooves, Reveal, Pencil Ribs, Embossed

Manufacturing

Factory


Testing/Agency Approvals

FW Reveal: ASTM E-1592

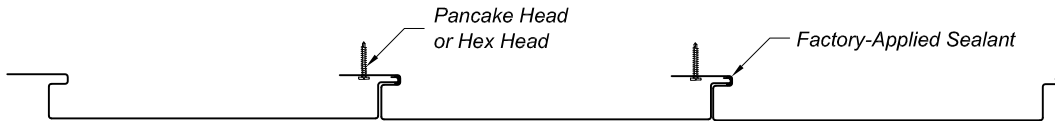


TYPICAL SEAM ENGAGEMENT

Pancake Head or Hex Head Fasteners ≤ 24" O.C.
(Fastener Type As Required)

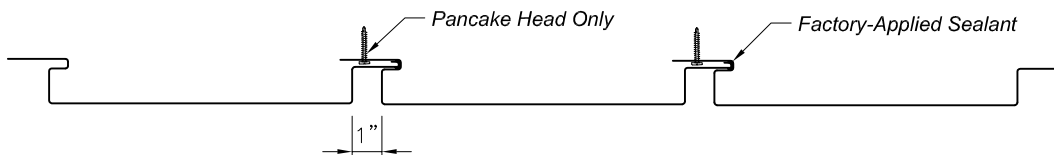

TYPICAL 1" REVEAL SEAM ENGAGEMENT

Pancake Head Fasteners ≤ 24" O.C.
(Fastener Type As Required)

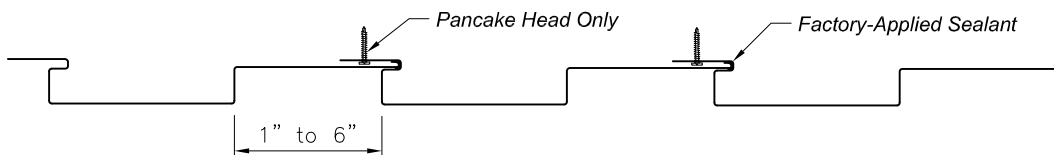

CUSTOM REVEAL SEAM ENGAGEMENT

Pancake Head Fasteners ≤ 24" O.C.
(Fastener Type As Required)