



138T SYMMETRICAL PANEL




SMOOTH PROFILE
Optimum Widths 16"

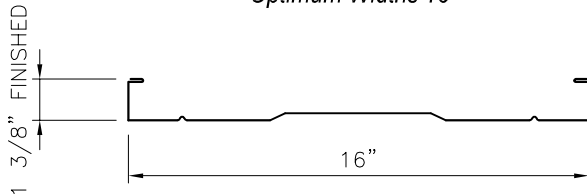

PLANK & PENCIL PROFILE
Optimum Widths 16"

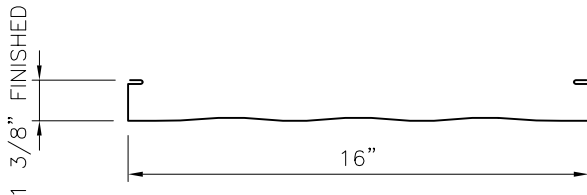

STRIATED PROFILE
Optimum Widths 16"

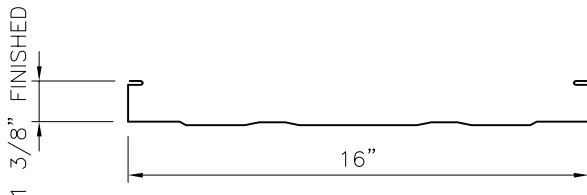

**STIFFENER RIB PROFILE
WITH OPTIONAL CLIP OFFSET**
Optimum Widths 16"

Applications

Symmetrical roof/wall panel used on slopes down to 2/2:12. Continuous length no end laps.

Substrates

Plywood, Metal Deck

Standard Material

Alum-Zinc coated steel, Aluminum, .7mm Zinc

Standard Gauge

24 ga. Steel

Aluminum Gauge

.040 aluminum

Optional Gauge

22 ga. Steel

Optional Material

ABC DuraZinc®

Manufacturing

Factory, Jobsite
Roll-formed,

Finishes


Acrylic Coated Galvalume and
Fluoropolymer (Kynar 500®
PVDF resin-based)

Texture


Smooth, Plank & Pencil, Striations, Stiffener Ribs.

Testing/Agency Approvals


Uplift: UL 580, UL 1897
Static Water: FM 4471 Appendix G, ASTM E-2140
Air & Water Infiltration: ASTM E-1680, ASTM E-1646
Impact Resistance: UL Class 4, FM Class 1-SH
Fire Rating: UL Class A;
Florida Building Code.

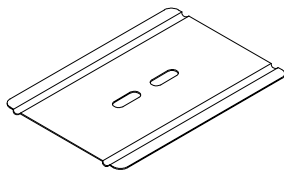

BEARING PLATE
24 GA., 50 KSI Steel






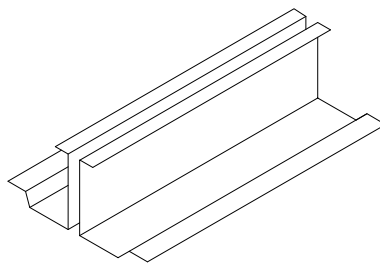


MULTISPAN CLIP
2-Piece
24 GA (Standard)
22 GA (Available)
(Continuous or 8" long clips)

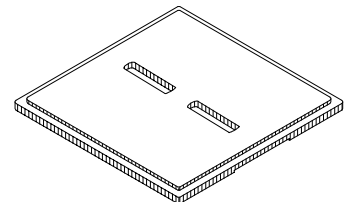

STACKABLE LEVELING SHIM
6" x 6" x 1/4" Thick

138T SYMMETRICAL PANEL

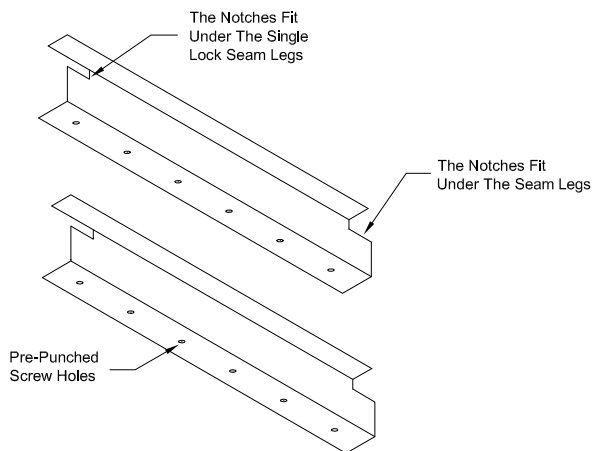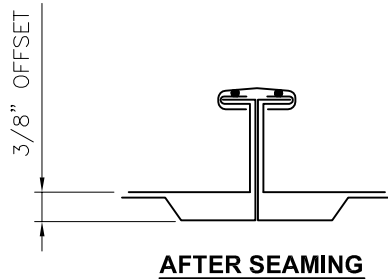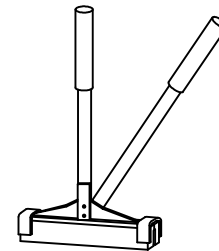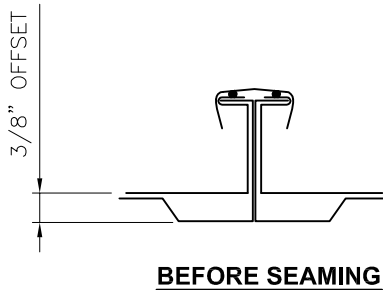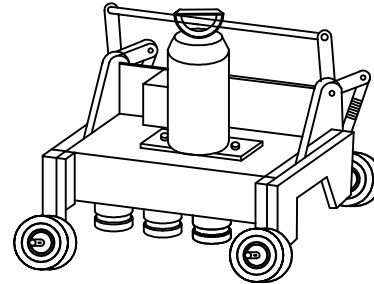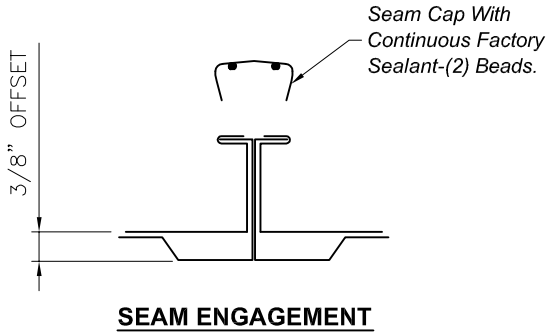

Optimum Widths- 16"
Additional lengths for hips available.

